



Hall-Mark Fire Apparatus
PO Box 1770
Ocala, FL 34478
Office: (352) 629-6305
Fax: (352) 629-2018
Toll-Free: 1-800-524-6072

FIRE APPARATUS PROPOSAL AND AGREEMENT

DATE: September 17,2003

This Proposal has been prepared for:

**Nassau County Fire Rescue
11 North 14th Street Suite 12
Fernandina Beach, FL 32034-0494**

We propose to furnish to you one (1) Emergency-One D251 2500 gallon tanker- pumper built on an International 7600 2-door chassis with 26" cab extension, to be custom built and equipped per the attached components lists.

Delivery will be F.O.B Fernandina Beach, FL. and will be made approximately 180 calendar days after receipt and acceptance of the ordered chassis . Terms of payment shall be as stated in the lease purchase plan.

The current purchase price for the specified tanker- pumper is as follows:

Dealer Cost of apparatus per attached list: \$ 221,068.00
Supplied Equipment per attached list: \$ 10,932.00
Total Cost of Unit with Equipment: \$ 232,000.00

The proposal price shall expire unless accepted within 30 days after the date set above. The proposal price deadline may be extended, in writing, providing chassis pricing and components availability has not changed.

This proposal is deemed acceptable by the undersigned. In witness whereof, The Company and the Purchaser shall execute an agreement to this proposal with signatures from authorized representatives as of the date set forth by each.

Sales Dealership: Hall-Mark Fire Apparatus

Purchaser: Nassau County

By: *[Signature]*

By: *[Signature]*

Typed/Printed: Philip R. Lincoln

Typed/Printed: Vickie Samus
Chairman, Nassau County Board of

Title: Sales Manager

Title: County Commissioners

Date: 9/17/03

Date: 9/22/03

Attest:

Approved as to form:

[Signature]
J.M. "Chip" Oxley, Jr.
Ex-Officio Clerk

[Signature]
Michael S. Mullin
County Attorney

*Approved 9/10/03
funding identified
9/22/03
CS*

Sales & Service for all your Fire Apparatus & Equipment Needs -



Loan Amortization Schedule

Terms

Vehicle Purchase Price: 232,000.00 Year of Lease: 7
 Cash Down Payment: 38,000.00 Payments/Year: 1
 Trade Allowance: 0.00 Interest Rate: 3.76%
 Trade Payoff: 0.00
 Trade Equity: 0.00
 Total Downpayment: 38,000.00
 Amount Financed: 194,000.00
 Guaranteed Trade Value: 0.00

Payment#	Payment Amount	Interest	Principal	Principal Balance
				232,000.00
Downpayment	38,000.00			194,000.00
1	32,036.19	7,294.40	24,741.79	169,258.21
2	32,036.19	6,364.11	25,672.08	143,586.13
3	32,036.19	5,398.84	26,637.35	116,948.77
4	32,036.19	4,397.27	27,638.92	89,309.86
5	32,036.19	3,358.05	28,678.14	60,631.72
6	32,036.19	2,279.75	29,756.44	30,875.28
7	32,036.19	1,160.91	30,875.28	0.00

Federal Signal Leasing

Terms & Conditions

- Rates are subject to change without notice. Quotes are good for 30 days unless accepted by the customer and a purchase order is placed for the equipment.
- Interest paid by Lessee under the lease agreement must be exempt from federal income taxes.
- Subject to credit approval and documentation drafted/approved by ESL.
- Factors provided are for payment in arrears - the first payment is due one year (in the case of annual payments) or one month (for monthly payments) from the date of delivery. Advance payments (where the first payment is due at delivery) will be quoted upon request.
- Prepayment is permitted without penalty on any annual anniversary of delivery with appropriate notice as provided in the lease agreement.
- Volunteer Fire Departments qualify for tax-exempt financing for the purchase fire apparatus only, and they must comply with IRS requirements (public hearing, approval by local governmental entity, written agreement to provide firefighting services.)

August 11, 2003

Tanker 2500 Side Mount/Midship w/Commercial Chassis

, ,

Dealership / Salesperson: / *Phil Lincoln*

Catalog Number "X"	Description	Qty	Ext. Description	Required Information	Dealer Comments
0_D251	2500 Comm Tanker	1		Unit to Be:	NFPA COMPLIANT AS A MOBILE WATER SUPPLY WITH A FIRE PUMP.
1-200-09-A	IHC 7600 2-DOOR WITH 26" CAB EXTENSION, C12 355HP, 250"W/B	1			SPQ# INASSAU-073103HM
1_100_10_02	Comm Chas Prep E-1 Supp-Non FL	1			
1_200_09_99	Comm Chass Non-FL-SPQ	1	Call Chassis Purchasing for Price		
2-001-A	DELUXE TRIM PACKAGE FOR IHC 7600 2-DOOR W/ 26" CAB EXTENSION	1			INCLUDES BATTERY ACCESS DOOR, STEPS BOTH SIDES, FUEL TANK COVER, TRIM PLATES BELOW CAB.
2-A	EXHAUST MODIFICATION	1			MODIFY VERTICAL EXHAUST TO HORIZONTAL EXHAUST, TO EXIT AHEAD OF RIGHT REAR WHEELS.
2-B	ILLUMINATED BUMPER GUIDE POSTS-PR	1			STAINLESS GUIDE POSTS WITH AMBER LIGHT TOP OF EACH POST ATTACHED TO EACH END OF BUMPER SIDE

EXTENSION. LIGHTS TO
ACTIVATE WHEN
CLEARANCE LIGHTS ARE
ON.

2_000_00_00	Approval Drawings	1			
2_000_00_05	Delivery Requirement	1		Date:	120 AROC
2_000_00_10	Inspection Trip	3		Date:	ONE INSPECTION UPON ARRIVAL OF CHASSIS AT E-ONE. ONE INSPECTION AT BODY LOAD. ONE FINAL INSPECTION.
2_000_01_00	Prebuild Conference	1		Date:	THIS IS AN EMERGENCY PURCHASE. CONFERENCE TO BE ASAP.
2_003_01_01	Bumper-Frt Extended w/10" S/S	1	Front bumper extension w/10" S/S bumper.	Specify Extension (12", 16", 20" and 24" available):	12" FRONT EXTENSION
2_007_10_00	Tow Eyes-Frt Painted Down	1	Requires extended bumper on commercial chassis.		
2_011_02_20	Air Horns Recsd in Bump (PR)	1	Requires Control. If Chrome bumper - Requires Option: Bumper-Chrome Front 2-002-01- 00		
2_011_02_30	Cntrl Lanyard Airhorns Y Type	1	Requires air horn option.		
2_020_01_00	Mudflaps-Black-Rear	1			
2_023_02_00	Tow Eyes-RR Below Bdy Painted	1			
2_101_00_02	Batt Charger-E-One 110	1	Super Smart 20 AMP.	Receptacle Location:	IN TRIM BELOW DRIVER'S DOOR.
2_155_00_15	S/S Wheel Trim Pkg Frt Axle	1			
2_155_00_17	S/S Wheel Trim Pkg Rr Tand	1			

2_200_00_00	Air Inlet	1	To charge brake system. Commercial chassis only.	Location:	NEXT TO SHORELINE RECEPTACLE.
2_900_00_04	Seating Capacity Tag (4)	1			
3_000_00_06	OAH Restriction None	1			
3_000_00_08	OAL Restriction None	1			
3_000_00_11	Hsbd Capacity Requirements	1		Specify DJ or LDH. List Hoseload Left to Right.	1000' OF 3" LDH, 400' OF 2.5" DJ.
3_000_00_70	Body Modification 100"WideBdy	1	Not available with 12" deep High Side Option 3-020-96-12		
3_000_99_05	Body Specs SM Tanker-Tandem	1	Tandem axle tanker only.		
3_065_91_05	CommTanker Bdy-2500 Gal	1			
3_084_10_15	4-Opng 3/4 Rt Drp Down Drs	1			
3_085_00_00	HiSide Compr Fldng TnkStorage	1	Requires wide body option.	Specify model and dimensions of tank:	DRIVER SIDE OF BODY, FOLDATANK FDT-2500 GALLON PORTA-TANK. COMPARTMENT AT FRONT OF BODY TO BE 50" WIDE X 32" HIGH X 12" DEEP.
3_085_00_10	Flex Joint for Pmp Module	1			
3_116_05_71	2500 Gal (T) Water- E-One	1			
3_117_00_07	Newton Dump Mounting Plate	1			
3_118_10_15	Resc Style Compt Drs-PerSide	1	Additional charge only. Requires 3/4 or high side option.		RIGHT SIDE OF BODY
3_132_01_03	Hosebed Divider	2		Specify long or short and quantity of each:	LONG
3_134_01_05	Sgl LgCompt DblDrs IPO 2-Cpts	1			R1 AND R2 COMBINED INTO ONE 50" WIDE

				COMPARTMENT.
3_136_01_21	Adj Shelf Tracking (Set)	2	Does not include shelf. Compartments with multiple depths require (1) set for each depth.	Specify Location: L1 AND L2
3_136_01_22	Alum Shelf (EA) w/2" Lip	4	Specify location including upper or lower in compartments with multiple depths and whether they are fixed or adjustable (Adjustable Requires Adjustable Shelf Track)	Specify Location, Compartment, and Fixed or Adjustable: L1 AND L2 ON ADJUSTABLE TRACKS. R1 FIXED AT OFFSET. R4 FIXED AT OFFSET.
3_136_20_16	Number Plate Removable (ea)	4	12" x 12" painted numbers not included (Job Color) with brackets.	Specify Location: CENTER OF FRONT BUMPER AND ONE ON REAR OF BODY TO LEFT OF DUMP VALVE. TWO OTHERS LOCATION TBD.
3_137_02_00	Step-Large Folding (EA)	4		Location: 3 ON LEFT FRONT COMPARTMENT FACE DIRECTLY BEHIND PUMP PANEL. 1 ON RIGHT COMPARTMENT FACE BELOW RIGHT INTERMEDIATE PUMP PANEL STEP.
3_137_05_10	Step-Gator Grip Surfaces	1		Location: ALL STANDING AND STEP SURFACES.
3_146_00_02	Step-Intermediate Pump Pnl	1	N/A on Pump Operators' Panel. Requires additional folding step.	Location: RIGHT PUMP PANEL
3_147_01_03	Step-RR NFPA Hosebed Access	1	Left Side at Rear	
3_167_00_01	SCBA Bottle Storage in WhlWell	4	Not available on small rescues with 44" wide compartment over the rear wheels.	Location: 2 EACH REAR FENDER PANEL, 1 AHEAD OF AND 1 BEHIND REAR WHEELS.
3_220_00_09	No Rear Compts (2500/3000)	1	For rear dump.	

4_009_01_00	Hale Qflo 750-1250-1/S	1	Includes electric primer, pump shift, master drain and (2) steamers with back of cap approx. 1" from panel.		
4_018_00_09	Pump Cert 750-2250 GPM	1		Specify GPM:	1250 GPM
4_100_00_10	Intake Relief Valve Akron	1			
4_103_06_05	Tank Lvl Ga-IC5-Water	1			
4_105_01_00	Pump Cooler	1	Will dump to the ground on units with an ATP foam system.		
4_114_04_50	Ga Elec Engine - Package	1	Pump panel mounted.		
4_204_02_20	Tank Fill-2.5"	1	Pump panel control.		
4_205_99_22	1.5" Double Crosslay	1	With 2" plumbing. Includes rollers installed horizontally and vertically on each end of the crosslay. Includes bleeder valve.		SINGLE STACK X-LAYS.
4_208_00_06	2.5" Left Panel Discharge	2	Pump panel control.		
4_208_01_06	2.5" Right Panel Discharge	1	Pump panel control.		
4_208_04_03	2.5" Left Rear Discharge	1	With stainless steel plumbing.		
4_209_06_03	3" Deck Gun Discharge	1	With stainless steel plumbing.		
4_211_00_00	Rear Tank Inlet-2.5"	1		Location:	RIGHT REAR AS LOW AS POSSIBLE.
4_211_02_15	Tank To Pump-3"	1	Pump panel control.		
4_212_00_13	Left Intake-2.5"	1	Pump panel control.		
4_231_10_05	Rear Newton Dump Valve	1	Requires Newton dump mounting plate option. Pumpers require engineering approval.		
4_231_10_10	Extension Tube-Directional	1			

5_003_25_08	Whln Edge 9308NFPA-MK7 Lt Bar	1	65" long with MK7 medium profile mounts.		
5_004_10_40	Spkr Fed FM-100EF	1	Chrome bumpers without pre-punched holes requires chrome front bumper option. Requires extended front bumper.	Location:	OFFICER SIDE OF BUMPER.
5_006_00_00	Fed Q2B Siren-Pedestal Mnted	1	Requires engineering approval for Ambulances.	Location and switch location:	LOCATE Q2B DRIVER SIDE OF BUMPER AND SWITCH OFFICER SIDE FLOOR.
5_08_95	Elect Sys-Pmp/Tnk Multiplexed	1	N/A on Hurr or Sentry II chassis's. Includes compt, pump panel, clearance and Weldon taillights, backup alarm and load management system.	Load manager sequence:	ENGINEERING STANDARD. LOCATE REAR TAIL LIGHT ASSEMBLIES SO THERE IS ADEQUATE ROOM FOR ONE FEDERAL GS5 RED STROBE LIGHT OVER THE TAIL LIGHTS AND ONE GS5 AMBER STROBE LIGHT UNDER THE TAIL LIGHTS.
5_102_03_55	Fed PA300M Siren	1			MOUNT IN CENTER OF MAP BOX CONSOLE FOR EASY ACCESS BY DRIVER AND OFFICER.
5_104_02_17	Sw Horn Button 2Pos DOT/Q2B	1	Switch to allow horn button to activate DOT or Q2B.		
5_200_01_00	Switch Additional 12V/15A	1		Specify Location and Function:	LOCATE SWITCH ON SWITCH CONSOLE. TO ACTIVATE BOTH REAR UPPER UNITY DECK LIGHTS REMOTELY FROM CAB.
5_208_10_20	Whln RB6PAP Beacon (Pr)	1	Amber lens. One each side at		1 PER REAR LIGHT

5_210_12_16	Whln 900 Scene Lts 26Deg (PR)	1	rear. Whelen 26 degree scene lights with weatherproof connectors.	Specify location & switching:	STANCHION ONE (1) OVER EACH SIDE PUMP PANEL CENTERED IN SIDE OF DUNNAGE PAN. BOTH LIGHTS TO BE ACTIVATED BY ONE (1) SWITCH LOCATED ON THE SWITCH CONSOLE AND LABELLED "SIDE SCENE LIGHTS".
5_210_18_01	Fed GS5 Strobe NFPA over22'	1	Over 22' Lower Level Light Pkg- Includes 10 Lights and required power supplies. Located Per NFPA 1901		LOCATE REAR STROBES DIRECTLY OVER REAR TAIL LIGHT ASSEMBLIES. LOCATE MID-BODY STROBES IN CENTER OF REAR FENDER PANELS LOW BETWEEN THE WHEELS.
5_210_18_51	Fed GS5F Strb Red (Pr)	1	Requires power pack or option with spare power pack outlets.	Specify location & function:	LOCATE IN TRIM EACH SIDE OF CAB CENTERED UNDER CAB EXTENSION. WIRE TO 4-PLACE 90WATT POWER SUPPLY. THESE STROBES AND THE REAR LOWER AMBER STROBES TO BE SWITCHED TOGETHER BY ONE SWITCH BUT SEPARATELY FROM ALL OTHER STROBES. LABEL SWITCH "LOWER RED/AMBER STROBES".
5_210_18_75	Fed GS5F Strb Amber (Pr)	1	Requires power pack or option w/spare power pack outlets. Requires engineering approval	Specify location & function:	LOCATE UNDER REAR TAIL LIGHT ASSEMBLIES. WIRE TO 4-PLACE

5_210_18_80	Fed Strb Pwr Pk 4Pl 90Watt	1	for NFPA applications. Required when using Federal Signal strobes. Federal Signal SPS-4 NFPA 4place 90watt strobe power supply.		90WATT POWER SUPPLY. FOR STROBES UNDER CAB SIDE EXTENSIONS AND AMBER STROBES UNDER REAR TAIL LIGHT ASSEMBLIES.
5_211_01_00	Deck Light - Unity (PR)	1		Location:	1 EACH LIGHT STANCHION INBOARD OF WARNING LIGHTS.
5_211_10_00	Deck Light Wiring Circuit	1	Circuit wiring rear deck/scene light through chassis reverse. Requires rear deck or scene light.		
5_307_01_01	Cab Dome Large Lights	3	N/A on E-One Chassis. Required on Comm Chassis-1 Light per door.		2 IN FRONT AHEAD OF FRONT SEATS AND ONE IN REAR CENTERED BETWEEN SCBA SEATS. REAR LIGHT TO HAVE RED LENS.
5_312_10_00	SpotLt-Spectly 2150 HndHld	1		Specify hardwire or plug in and location:	HARDWIRED OFFICER SIDE OF DASH.
5_508_11_00	Fed Nightfighter w/Int Pole	2		Location:	1 EACH FRONT BODY CORNER AHEAD OF X-LAYS. DRIVER SIDE LEIGHT TO SERVE AS HOSE LOADING HOSEBED LIGHT.
7_002_01_00	10' Folding Attic Ladder	1			
7_002_02_00	Alum CastBrkt for FldingLad	1	For 8' or 10'.	Location and Specify Alco-lite or Duo-Safety ladder and size:	RIGHT SIDE OF BODY.
7_004_02_00	Alco-lite PRL-14 Roof Lad	1			

7_009_01_00	Alco-lite PEL-24 Ext Lad	1		
7_009_02_00	Vertical Ladder Brackets	1	Specify location and size and model # of ladders:	RIGHT SIDE OF BODY, 14' ROOF AND 24' 2-SECTION ALCOLITE LADDERS.
7_009_05_00	Adjustable Track for Lad Brkts	1		
7_106_00_01	HardSuct Rack 4.5"to6"Hose(EA)	2	Location:	ONE OVER LEFT COMPARTMENTS AND ONE OVER LADDERS.
7_207_01_00	Pike Pole Bracket (EA)	1	Location:	TOP OF RIGHT SIDE COMPARTMENTS INBOARD OF ATTIC LADDER BRACKETS NEAR REAR OF BODY, FOR 10' FG PIKE POLE.
7_515_00_00	Chr Disch Elbow 2.5" 45Deg	3		
8_000_00_05	Scotchlite Dlr/Cust Applied	1		
8_003_03_00	Paint Body-Large	1	For Aerials,Tandem Axle Tankers and Rescues. Color:	CAB PAINTED BLACK OVER RED BY IHC. BODY PAINTED 3225 RED.
95_700	1 Year Standard Warranty	1		
95_750	10 Year/100,000 Mile Structural	1	Statement of Warranty	
95_760	Lifetime E-One Poly Tank	1	Statement of Warranty	
95_781	10 Yr Stainless Steel Plumbing	1	Statement of Warranty	
95_782	10 Year Paint & Lifetime Perforation	1	Statement of warranty. Fire Apparatus, ARFF, Trident, Street Warrior, and Light Rescues.	
95_900	Manuals Operat&Srcv CD-ROM	1		
ConfD251	Tanker 2500 Side Mount/Midship w/Commercial Chassis	1		

HALL-MARK FIRE APPARATUS, INC.

Dealer Supplied Equipment List

S.O.#

Customer Nassau County Fire Rescue

Unit: 2500 Gallon Tanker

As of: 08/11/03

<u>Item</u>	<u>Part Number</u>	<u>Vendor</u>	<u>Qty.</u>
TURBOJET NOZZLE 1.5"	1722	Akron	2
APOLLO 2-INLET DECK/PORTABLE MONITOR WITH	3423	Akron	1
AKROMATIC 1250 MASTER STREAM NOZZLE FOR 2500 GALLON FOLDING TANK, ALUMINUM FRAME, 22 OZ HYPALON	5060	Akron	1
	FDT-2500-ALUM	Fol-Da-Tank	1
10' X 6" PVC SUCTION HOSE	2P601	Kochek	2
6" BARREL STRAINER, CHROME	BS60C	Kochek	1
SOFT SUCTION HOSE RUBBER COVERED	RC6081	Kochek	1
LETTERING & STRIPING		McKnight	1
10' PIKE POLE	SPD-10	Nupla	1
1-3/4" X 50' YELLOW ATTACK HOSE	FCD17BY50/15N	Snap Tite	4
1-3/4" X 50' RED ATTACK HOSE	FCD17R50/15N	Snap Tite	4
COLLISION RESTRAINT STRAPS	CRS	Zico	2
6" LOW LEVEL STRAINER	QD-600-NST	Zico	1
MOUNTING BRACKET FOR LOW LEVEL STRAINER	QD-450/600-MB	Zico	1
WHEEL CHOC	SAC-44	Zico	2
WHEEL CHOC HOLDER	SQCH-44-H	Zico	2
AIR PACK BRACKETS	UN-6-30-3-SF	Zico	2
INSTALLATION OF ABOVE ITEMS			24
Totals For Truck:			





NASSAU COUNTY BOARD OF COUNTY COMMISSIONERS
EMERGENCY SERVICES DEPARTMENT



FIRE/RESCUE DIVISION

11 North 14th Street, Suite 12
Fernandina Beach, Florida 32034-0494
(904) 491-7525 • (904) 879-3300 • 1-866-832-1317
Fax: (904) 321-5748

TO: Beth for the Management Committee
CC: Nassau County Board of County Commissioners
Chief Chuck Cooper, Fire/Rescue
FROM: Thomas B. Kochheiser, Director *[Signature]*
DATE: August 25, 2003
SUBJECT: Nassau County Fire / Rescue: Engine / Tanker Proposal

03 AUG 26 AM 9:41

COMMUNICATIONS

Over the past several months there has been much discussion on the level of service delivery to the residents and visitors for the unsupplied unincorporated areas of the Western Nassau County. Due to the increased need in services for this area the Board of County Commission accepted and adopted the Fire Department recommendation to place six (6) additional fire fighter / paramedics, two per shift, at the Hilliard Fire Station 40. In addition, a recommendation was provided with the request by the Department that consideration be given for the purchase of an e additional personnel.

The following are some of the reasons felt to be imj review in assisting them in making a determinatio purchase of the requested apparatus:

- The engine / tanker will provide an immed 2,500 gallons of water for the entire non-suppl water source until the volunteer tankers can ; tanker support.
- This apparatus would have the pump, compa capable of being a stand alone apparatus and cc location in the future as the needs dictate.
- The apparatus could provide Advanced Life Support capabilities with necessary storage capacities for medical supplies and paramedic equipment and would be able to act as a first response EMS apparatus on initial responses.
- The purchase of this apparatus would then allow for the Yulee Station 3 Tanker be released back to the Yulee Station 3 coverage area.

*bring back
of funds
next meeting 9/15?
9/22
Chief, Dubois
& Chp*

APPROVED

DATE 9/20/03

*funding identified 9/22/03
Ct*

- This apparatus would be instrumental in the Boards objective in working with ISO in attempting to reduce the overall fire protection class in the non-supplied areas of the County.

Although no funding source has been specifically identified for the purchase of this apparatus it may be that a lease / purchase option would provide an opportunity for consideration over an out right purchase. Lease / purchase would have the advantages of purchasing the apparatus now in that there is a 180 day construction period, there would be no budget surprises, lease / purchasing provides flexible options, and no payment would be required until delivery in February or March. In as much as this apparatus would have a useful life expectancy of 15 – 20 years this may assist in reducing cash expenditures in a very tight budget year.

At this time it is being requested that the Management Committee review this request and that a recommendation be forwarded to the entire Board of County Commission for additional consideration and acceptance.



NASSAU COUNTY BOARD OF COUNTY COMMISSIONERS
EMERGENCY SERVICES DEPARTMENT



FIRE/RESCUE DIVISION

11 North 14th Street, Suite 12
Fernandina Beach, Florida 32034-0494
(904) 491-7525 • (904) 879-3300 • 1-866-832-1317
Fax: (904) 321-5748

MEMORANDUM

TO: Thomas B. Kochheiser, Director
FROM: C. W. Cooper, Fire Chief *CWC*
DATE: August 18, 2003
RE: District Four

I respectfully submit that a priority be issued on the following request. We have requested from the Board of Nassau County Commissioners that the contract not be extended to the Town of Hilliard. I understand the funds to meet the contract for the upcoming year was encumbered.

My recommendation to you is to submit to the board that we enter into a lease agreement with Federal Signal on a lease purchase of the 2,500-gallon Pump/Tanker, placing this apparatus at Station 40 allowing the best use of our newest positions.

A 2,500-gallon Pumper/Tanker will provide immediate response of a vital water source and additional firefighters to the scene. As time allows, this will be an apparatus that will be moved north of Hilliard as a stand alone company. After placing great research in the situation I feel this will be the best step. This apparatus will come as a turnkey operation inclusive of necessary equipment.

This apparatus can be purchased per the Tallahassee Bid thru Hallmark Fire Apparatus. The build time will be approximately 4-6 months; we are still using Tanker 3 from Yulee.

I have attached information regarding the Tanker/Pumper for your review. If I may be of any further assistance in this matter please call on me.

Date: Monday, August 11, 2003

Loan Amortization Schedule

Terms

Vehicle Purchase Price: 232,000.00 Year of Lease: 7
 Cash Down Payment: 0.00 Payments/Year: 1
 Trade Allowance: 0.00 Interest Rate: 3.76%
 Trade Payoff: 0.00
 Trade Equity: 0.00
 Total Downpayment: 0.00
 Amount Financed: 232,000.00
 Guaranteed Trade Value: 0.00

Payment#	Payment Amount	Interest	Principal	Principal Balance
				232,000.00
Downpayment	0.00			232,000.00
1	38,311.32	8,723.20	29,588.12	202,411.88
2	38,311.32	7,610.69	30,700.63	171,711.25
3	38,311.32	6,456.34	31,854.98	139,856.27
4	38,311.32	5,258.60	33,052.73	106,803.54
5	38,311.32	4,015.81	34,295.51	72,508.03
6	38,311.32	2,726.30	35,585.02	36,923.02
7	38,311.32	1,388.31	36,923.02	0.00

Federal Signal Leasing

Terms & Conditions

1. Rates are subject to change without notice. Quotes are good for 30 days unless accepted by the customer and a purchase order is placed for the equipment.
2. Interest paid by Lessee under the lease agreement must be exempt from federal income taxes.
3. Subject to credit approval and documentation drafted/approved by ESL.
4. Factors provided are for payment in arrears - the first payment is due one year (in the case of annual payments) or one month (for monthly payments) from the date of delivery. Advance payments (where the first payment is due at delivery) will be quoted upon request.
5. Prepayment is permitted without penalty on any annual anniversary of delivery with appropriate notice as provided in the lease agreement.
6. Volunteer Fire Departments qualify for tax-exempt financing for the purchase fire apparatus only, and they must comply with IRS requirements (public hearing, approval by local governmental entity, written agreement to provide firefighting services.)</L>



Hall-Mark Fire Apparatus
PO Box 1770
Ocala, FL 34478
Office: (352) 629-6305
Fax: (352) 629-2018
Toll-Free: 1-800-524-6072

FIRE APPARATUS PROPOSAL

DATE: August 11, 2003

This Proposal has been prepared for:

Nassau County Fire Rescue
11 North 14th Street, Suite 12
Fernandina Beach, FL 32034-0494

We propose to furnish to you one (1) Emergency-One D251 2500 gallon tanker-pumper built on an International 7600 2-door with 26" cab extension chassis, to be custom built and equipped per the attached components lists.

Delivery will be F.O.B. Fernandina Beach, FL, and will be made approximately 180 calendar days after receipt and acceptance of the ordered chassis. Terms of payment shall be as stated in the lease purchase plan.

The current purchase price for the specified tanker-pumper is as follows:

Dealer Cost of apparatus per attached list:	\$ 221,068.00
Supplied Equipment per attached list:	\$ 10,932.00
Total Cost of Unit with Equipment:	\$ 232,000.00

The proposal price shall expire unless accepted within 30 days after the date set above. The proposal price deadline may be extended, in writing, providing chassis pricing and components availability has not changed. This proposal is deemed acceptable by the undersigned. In witness whereof, The Company and the Purchaser shall execute an agreement to this proposal with signatures from authorized representatives as of the date set forth by each.

Sales Dealer: Hall-Mark Fire Apparatus

Purchaser: Nassau County

By: *[Signature]*
Typed/Printed: Jim Hall


By: _____
Typed/Printed: _____

Title: President

Title: _____

Date: 8/11/03



Date: _____

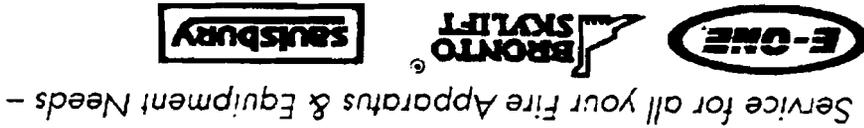

- Sales & Service for all your Fire Apparatus & Equipment Needs -



NASSAU COUNTY FIRE RESCUE
FERNANDINA BEACH, FL
BID. 03325
D251 COMMERCIAL TANKER
INTERNATIONAL 7600 2-DR EXT. CHASSIS

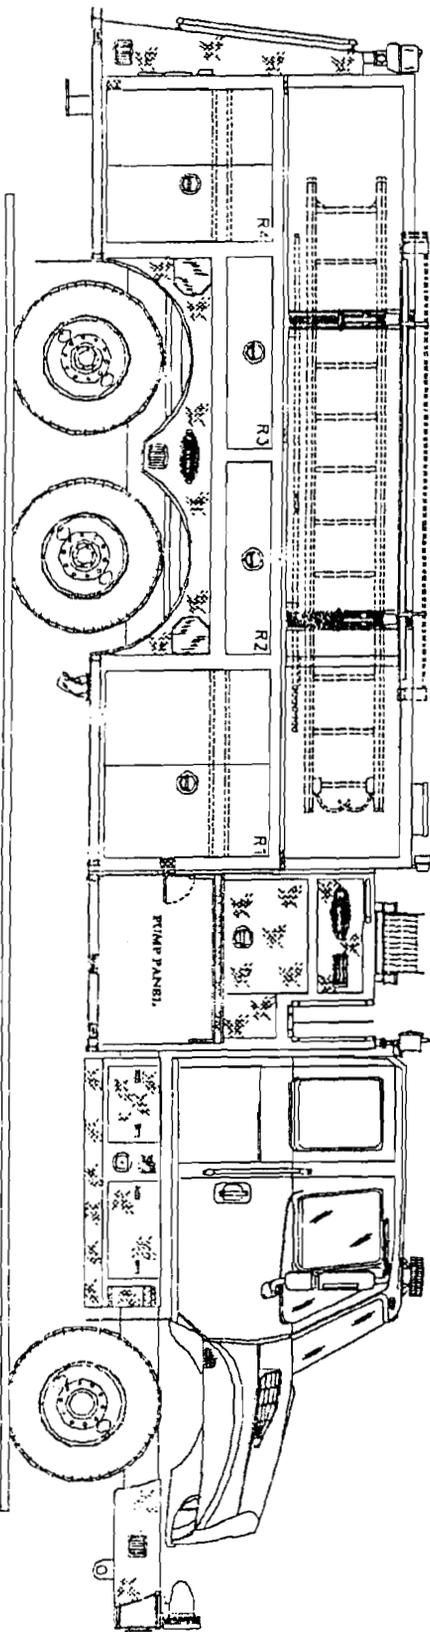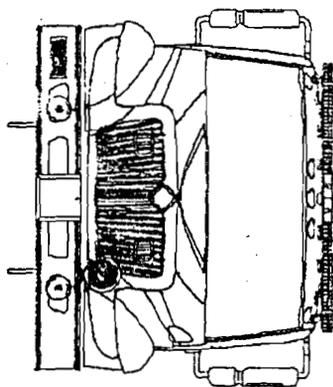

SCALE: 1/4" = 1'-0"



NASSAU COUNTY FIRE RESCUE FERNANDINA BEACH, FL


BID.03325

D251 COMMERCIAL TANKER
INTERNATIONAL 7600 2-DR EXT. CHASSIS


1250 GPM HALE OFLO PUMP 2500 GALLON WATER TANK		HOSE LOAD: 1000' OF 5.00" LOH 800' OF 2.50" BJ	
COMPT.	OPENING	INTERIOR DIMENSION	
L1/L2	23W 28H	23W	28H 220
L3	42W 28H	42W	28H 220
L4	50W 32H	50W	32H 120
L5	47W 32H	FBL-0A-TANK ACCESS	
R1	50W 44H	51W 12H 12D	UPPER
R2/R3	51W 12H	50W 28H 22D	LOWER
R4	42W 44H	42W 12H 12D	UPPER
		42W 28H 22D	LOWER

THIS DRAWING IS FOR REFERENCE PURPOSES. ALL DIMENSIONS ARE SUBJECT TO MINOR VARIATIONS DUE TO MANUFACTURING PRACTICES.

This print is the property of Emergency One, Inc. and is loaned to you subject to return on demand, unless otherwise agreed to in writing by Emergency One, Inc. Its contents are confidential and must not be copied or submitted to third parties for use or examination.

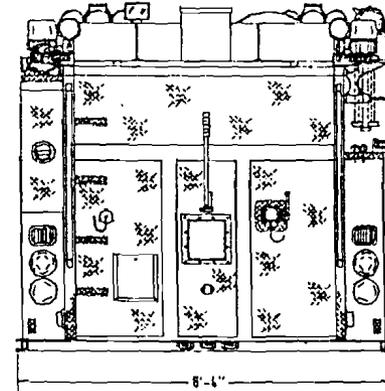

HOSEBED HEIGHT:
(FOR REFERENCE ONLY)
TO TAILBOARD: 73"
TO GROUND: 97"

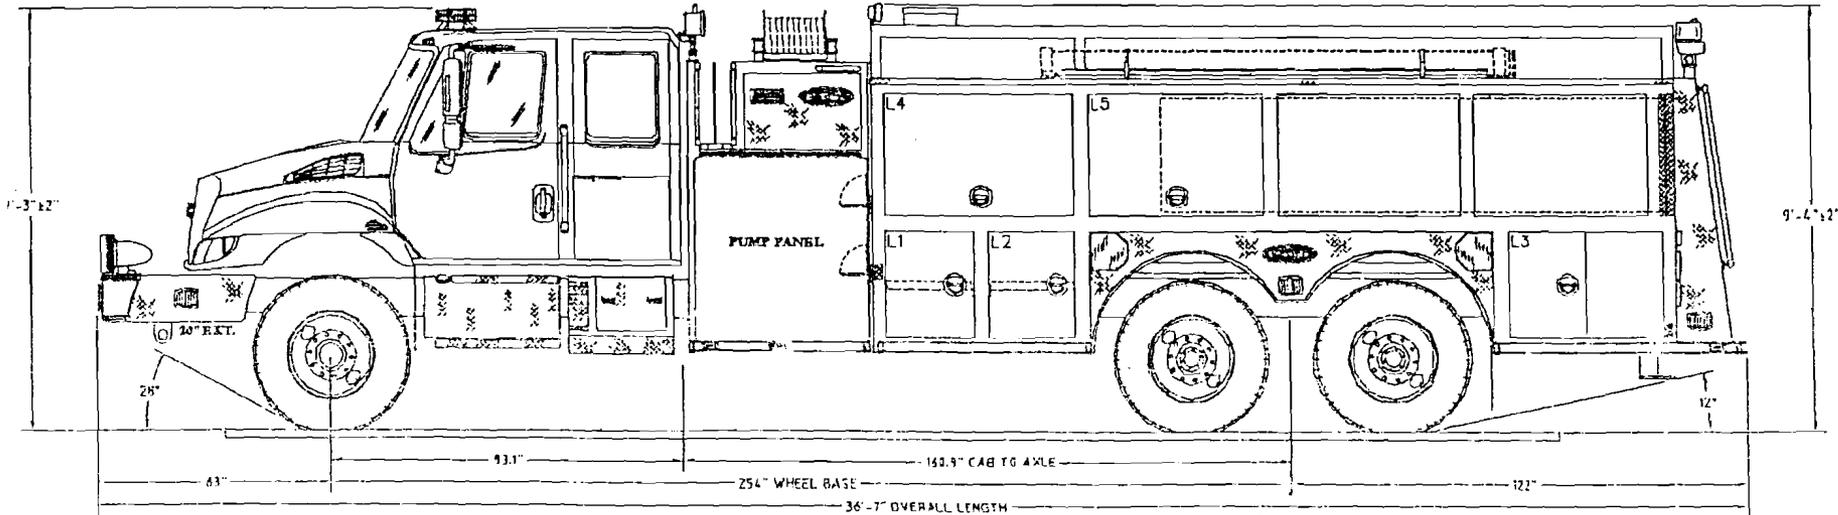

DATE	BY	CHECKED	APPROVED
11/11/11

August 11, 2003

Tanker 2500 Side Mount/Midship w/Commercial Chassis

,,

Dealership / Salesperson: *Phil Lincoln*

Catalog Number "X"	Description	Qty	Ext. Description	Required Information	Dealer Comments
0_D251	2500 Comm Tanker	1		Unit to Be:	NFPA COMPLIANT AS A MOBILE WATER SUPPLY WITH A FIRE PUMP.
1-200-09-A	IHC 7600 2-DOOR WITH 26" CAB EXTENSION, C12 355HP, 250"W/B	1			SPQ# INASSAU-073103HM
1_100_10_02	Comm Chas Prep E-1 Supp-Non FL	1			
1_200_09_99	Comm Chass Non-FL-SPQ	1	Call Chassis Purchasing for Price		
2-001-A	DELUXE TRIM PACKAGE FOR IHC 7600 2-DOOR W/ 26" CAB EXTENSION	1			INCLUDES BATTERY ACCESS DOOR, STEPS BOTH SIDES, FUEL TANK COVER, TRIM PLATES BELOW CAB.
2-A	EXHAUST MODIFICATION	1			MODIFY VERTICAL EXHAUST TO HORIZONTAL EXHAUST, TO EXIT AHEAD OF RIGHT REAR WHEELS.
2-B	ILLUMINATED BUMPER GUIDE POSTS-PR	1			STAINLESS GUIDE POSTS WITH AMBER LIGHT TOP OF EACH POST ATTACHED TO EACH END OF BUMPER SIDE

					EXTENSION. LIGHTS TO ACTIVATE WHEN CLEARANCE LIGHTS ARE ON.
2_000_00_00	Approval Drawings	1			
2_000_00_05	Delivery Requirement	1		Date:	120 AROC
2_000_00_10	Inspection Trip	3		Date:	ONE INSPECTION UPON ARRIVAL OF CHASSIS AT E-ONE. ONE INSPECTION AT BODY LOAD. ONE FINAL INSPECTION.
2_000_01_00	Prebuild Conference	1		Date:	THIS IS AN EMERGENCY PURCHASE. CONFERENCE TO BE ASAP.
2_003_01_01	Bumper-Frt Extended w/10" S/S	1	Front bumper extension w/10" S/S bumper.	Specify Extension (12", 16", 20" and 24" available);	12" FRONT EXTENSION
2_007_10_00	Tow Eyes-Frt Painted Down	1	Requires extended bumper on commercial chassis.		
2_011_02_20	Air Horns Recsd in Bump (PR)	1	Requires Control. If Chrome bumper - Requires Option: Bumper-Chrome Front 2-002-01- 00		
2_011_02_30	Cntrl Lanyard Airhorns Y Type	1	Requires air horn option.		
2_020_01_00	Mudflaps-Black-Rear	1			
2_023_02_00	Tow Eyes-RR Below Bdy Painted	1			
2_101_00_02	Batt Charger-E-One 110	1	Super Smart 20 AMP.	Receptacle Location:	IN TRIM BELOW DRIVER'S DOOR.
2_155_00_15	S/S Wheel Trim Pkg Frt Axle	1			
2_155_00_17	S/S Wheel Trim Pkg Rr Tand	1			

2_200_00_00	Air Inlet	1	To charge brake system. Commercial chassis only.	Location:	NEXT TO SHORELINE RECEPTACLE.
2_900_00_04	Seating Capacity Tag (4)	1			
3_000_00_06	OAH Restriction None	1			
3_000_00_08	OAL Restriction None	1			
3_000_00_11	Hsbdl Capacity Requirements	1		Specify DJ or LDH. List Hoseload Left to Right.	1000' OF 3" LDH, 400' OF 2.5" DJ.
3_000_00_70	Body Modification 100" Wide Bdy	1	Not available with 12" deep High Side Option 3-020-96-12		
3_000_99_05	Body Specs SM Tanker-Tandem	1	Tandem axle tanker only.		
3_065_91_05	Comm Tanker Bdy-2500 Gal	1			
3_084_10_15	4-Opng 3/4 Rt Drp Down Drs	1			
3_085_00_00	HiSide Compr Fldng Tnk Storage	1	Requires wide body option.	Specify model and dimensions of tank:	DRIVER SIDE OF BODY. FOLDATANK FDT-2500 GALLON PORTA-TANK. COMPARTMENT AT FRONT OF BODY TO BE 50" WIDE X 32" HIGH X 12" DEEP.
3_085_00_10	Flex Joint for Pmp Module	1			
3_116_05_71	2500 Gal (T) Water- E-One	1			
3_117_00_07	Newton Dump Mounting Plate	1			
3_118_10_15	Resc Style Compt Drs-PerSide	1	Additional charge only. Requires 3/4 or high side option.		RIGHT SIDE OF BODY
3_132_01_03	Hosebed Divider	2		Specify long or short and quantity of each:	LONG
3_134_01_05	Sgl LgCompt Dbldrs IPO 2-Cpts	1			R1 AND R2 COMBINED INTO ONE 50" WIDE

Part Number	Description	Quantity	Notes	Location	Notes
3_136_01_21	Adj Shelf Tracking (Set)	2	Does not include shelf. Compartments with multiple depths require (1) set for each depth.	Specify Location:	COMPARTMENT. L1 AND L2
3_136_01_22	Alum Shelf (EA) w/2" Lip	4	Specify location including upper or lower in compartments with multiple depths and whether they are fixed or adjustable (Adjustable Requires Adjustable Shelf Track)	Specify Location, Compartment, and Fixed or Adjustable:	L1 AND L2 ON ADJUSTABLE TRACKS. R1 FIXED AT OFFSET. R4 FIXED AT OFFSET.
3_136_20_16	Number Plate Removable (ea)	4	12" x 12" painted numbers not included (Job Color) with brackets.	Specify Location:	CENTER OF FRONT BUMPER AND ONE ON REAR OF BODY TO LEFT OF DUMP VALVE. TWO OTHERS LOCATION TBD.
3_137_02_00	Step-Large Folding (EA)	4		Location:	3 ON LEFT FRONT COMPARTMENT FACE DIRECTLY BEHIND PUMP PANEL. 1 ON RIGHT COMPARTMENT FACE BELOW RIGHT INTERMEDIATE PUMP PANEL STEP.
3_137_05_10	Step-Gator Grip Surfaces	1		Location:	ALL STANDING AND STEP SURFACES.
3_146_00_02	Step-Intermediate Pump Pnl	1	N/A on Pump Operators' Panel. Requires additional folding step.	Location:	RIGHT PUMP PANEL
3_147_01_03	Step-RR NFPA Hosebed Access	1	Left Side at Rear		
3_167_00_01	SCBA Bottle Storage in Whl Well	4	Not available on small rescues with 44" wide compartment over the rear wheels.	Location:	2 EACH REAR FENDER PANEL, 1 AHEAD OF AND 1 BEHIND REAR WHEELS.
3_220_00_09	No Rear Compts (2500/3000)	1	For rear dump.		

4_009_01_00	Hate Qflo 750-1250-1/S	1	Includes electric primer, pump shift, master drain and (2) steamers with back of cap approx. 1" from panel.		
4_018_00_09	Pump Cert 750-2250 GPM	1		Specify GPM:	1250 GPM
4_100_00_10	Intake Relief Valve Akron	1			
4_103_06_05	Tank Lvl Ga-IC5-Water	1			
4_105_01_00	Pump Cooler	1	Will dump to the ground on units with an ATP foam system.		
4_114_04_50	Ga Elec Engine - Package	1	Pump panel mounted.		
4_204_02_20	Tank Fill-2.5"	1	Pump panel control.		
4_205_99_22	1.5" Double Crosslay	1	With 2" plumbing. Includes rollers installed horizontally and vertically on each end of the crosslay. Includes bleeder valve.		SINGLE STACK X-LAYS.
4_208_00_06	2.5" Left Panel Discharge	2	Pump panel control.		
4_208_01_06	2.5" Right Panel Discharge	1	Pump panel control.		
4_208_04_03	2.5" Left Rear Discharge	1	With stainless steel plumbing.		
4_209_06_03	3" Deck Gun Discharge	1	With stainless steel plumbing.		
4_211_00_00	Rear Tank Inlet-2.5"	1		Location:	RIGHT REAR AS LOW AS POSSIBLE.
4_211_02_15	Tank To Pump-3"	1	Pump panel control.		
4_212_00_13	Left Intake-2.5"	1	Pump panel control.		
4_231_10_05	Rear Newton Dump Valve	1	Requires Newton dump mounting plate option. Pumpers require engineering approval.		
4_231_10_10	Extension Tube-Directional	1			

5_003_25_08	Whln Edge 9308NFPA-MK7 Lt Bar	1	65" long with MK7 medium profile mounts.		
5_004_10_40	Spkr Fed FM-100EF	1	Chrome bumpers without pre-punched holes requires chrome front bumper option. Requires extended front bumper.	Location:	OFFICER SIDE OF BUMPER.
5_006_00_00	Fed Q2B Siren-Pedestal Mnted	1	Requires engineering approval for Ambulances.	Location and switch location:	LOCATE Q2B DRIVER SIDE OF BUMPER AND SWITCH OFFICER SIDE FLOOR.
5_08_95	Elect Sys-Pmp/Tnk Multiplexed	1	N/A on Hurr or Sentry II chassis's. Includes compt, pump panel, clearance and Weldon taillights, backup alarm and load management system.	Load manager sequence:	ENGINEERING STANDARD. LOCATE REAR TAIL LIGHT ASSEMBLIES SO THERE IS ADEQUATE ROOM FOR ONE FEDERAL GS5 RED STROBE LIGHT OVER THE TAIL LIGHTS AND ONE GS5 AMBER STROBE LIGHT UNDER THE TAIL LIGHTS.
5_102_03_55	Fed PA300M Siren	1			MOUNT IN CENTER OF MAP BOX CONSOLE FOR EASY ACCESS BY DRIVER AND OFFICER.
5_104_02_17	Sw Horn Button 2Pos DOT/Q2B	1	Switch to allow horn button to activate DOT or Q2B.		
5_200_01_00	Switch Additional 12V/15A	1		Specify Location and Function:	LOCATE SWITCH ON SWITCH CONSOLE. TO ACTIVATE BOTH REAR UPPER UNITY DECK LIGHTS REMOTELY FROM CAB.
5_208_10_20	Whln RB6PAP Beacon (Pr)	1	Amber lens. One each side at		1 PER REAR LIGHT

5_210_12_16	WhIn 900 Scene Lts 26Deg (PR)	rear. 1 Wheln 26 degree scene lights with weatherproof connectors.	Specify location & switching:	STANCHION ONE (1) OVER EACH SIDE PUMP PANEL CENTERED IN SIDE OF DUNNAGE PAN. BOTH LIGHTS TO BE ACTIVATED BY ONE (1) SWITCH LOCATED ON THE SWITCH CONSOLE AND LABELLED "SIDE SCENE LIGHTS".
5_210_18_01	Fed GS5 Strobe NFPA over22'	1 Over 22' Lower Level Light Pkg- Includes 10 Lights and required power supplies. Located Per NFPA 1901		LOCATE REAR STROBES DIRECTLY OVER REAR TAIL LIGHT ASSEMBLIES. LOCATE MID-BODY STROBES IN CENTER OF REAR FENDER PANELS LOW BETWEEN THE WHEELS.
5_210_18_51	Fed GS5F Strb Red (Pr)	1 Requires power pack or option with spare power pack outlets.	Specify location & function:	LOCATE IN TRIM EACH SIDE OF CAB CENTERED UNDER CAB EXTENSION. WIRE TO 4-PLACE 90WATT POWER SUPPLY. THESE STROBES AND THE REAR LOWER AMBER STROBES TO BE SWITCHED TOGETHER BY ONE SWITCH BUT SEPARATELY FROM ALL OTHER STROBES. LABEL SWITCH "LOWER RED/AMBER STROBES".
5_210_18_75	Fed GS5F Strb Amber (Pr)	1 Requires power pack or option w/spare power pack outlets. Requires engineering approval	Specify location & function:	LOCATE UNDER REAR TAIL LIGHT ASSEMBLIES. WIRE TO 4-PLACE

5_210_18_80	Fed Strb Pwr Pk 4Pl 90Watt	1	for NFPA applications. Required when using Federal Signal strobes. Federal Signal SPS-4 NFPA 4place 90watt strobe power supply.		90WATT POWER SUPPLY. FOR STROBES UNDER CAB SIDE EXTENSIONS AND AMBER STROBES UNDER REAR TAIL LIGHT ASSEMBLIES.
5_211_01_00	Deck Light - Unity (PR)	1		Location:	1 EACH LIGHT STANCHION INBOARD OF WARNING LIGHTS.
5_211_10_00	Deck Light Wiring Circuit	1	Circuit wiring rear deck/scene light through chassis reverse. Requires rear deck or scene light.		
5_307_01_01	Cab Dome Large Lights	3	N/A on E-One Chassis. Required on Comm Chassis-1 Light per door.		2 IN FRONT AHEAD OF FRONT SEATS AND ONE IN REAR CENTERED BETWEEN SCBA SEATS. REAR LIGHT TO HAVE RED LENS.
5_312_10_00	SpotLt-Spccly 2150 HndHld	1		Specify hardwire or plug in and location:	HARDWIRED OFFICER SIDE OF DASH.
5_508_11_00	Fed Nightfighter w/Int Pole	2		Location:	1 EACH FRONT BODY CORNER AHEAD OF X-LAYS. DRIVER SIDE LEIGHT TO SERVE AS HOSE LOADING HOSEBED LIGHT.
7_002_01_00	10' Folding Attic Ladder	1			
7_002_02_00	Alum CastBrkt for FldingLad	1	For 8' or 10'.	Location and Specify Alco-lite or Duo-Safety ladder and size:	RIGHT SIDE OF BODY.
7_004_02_00	Alco-lite PRL-14 Roof Lad	1			

7_009_01_00	Alco-lite PEL-24 Ext Lad	1		
7_009_02_00	Vertical Ladder Brackets	1	Specify location and size and model # of ladders:	RIGHT SIDE OF BODY, 14' ROOF AND 24' 2-SECTION ALCOLITE LADDERS.
7_009_05_00	Adjustable Track for Lad Brkts	1		
7_106_00_01	HardSuct Rack 4.5"to6"Hose(EA)	2	Location:	ONE OVER LEFT COMPARTMENTS AND ONE OVER LADDERS.
7_207_01_00	Pike Pole Bracket (EA)	1	Location:	TOP OF RIGHT SIDE COMPARTMENTS INBOARD OF ATTIC LADDER BRACKETS NEAR REAR OF BODY, FOR 10' FG PIKE POLE.
7_515_00_00	Chr Disch Elbow 2.5" 45Deg	3		
8_000_00_05	Scotchlite Dlr/Cust Applied	1		
8_003_03_00	Paint Body-Large	1	For Aerials, Tandem Axle Tankers and Rescues.	Color: CAB PAINTED BLACK OVER RED BY IHC. BODY PAINTED 3225 RED.
95_700	1 Year Standard Warranty	1		
95_750	10 Year/100,000 Mile Structural	1	Statement of Warranty	
95_760	Lifetime E-One Poly Tank	1	Statement of Warranty	
95_781	10 Yr Stainless Steel Plumbing	1	Statement of Warranty	
95_782	10 Year Paint & Lifetime Perforation	1	Statement of warranty. Fire Apparatus, ARFF, Trident, Street Warrior, and Light Rescues.	
95_900	Manuals Operat&Srvc CD-ROM	1		
ConfD251	Tanker 2500 Side Mount/Midship w/Commercial Chassis	1		

HALL-MARK FIRE APPARATUS, INC.
Dealer Supplied Equipment List

S.O.#
Customer Nassau County Fire Rescue
Unit: 2500 Gallon Tanker
As of: 08/11/03

<u>Item</u>	<u>Part Number</u>	<u>Vendor</u>	<u>Qty.</u>
TURBOJET NOZZLE 1.5"	1722	Akron	2
APOLLO 2-INLET DECK/PORTABLE MONITOR WITH	3423	Akron	1
AKROMATIC 1250 MASTER STREAM NOZZLE FOR	5060	Akron	1
2500 GALLON FOLDING TANK, ALUMINUM FRAME, 22 OZ HYPALON	FDT-2500-ALUM	Fol-De-Tank	1
10' X 6" PVC SUCTION HOSE	2P601	Kochek	2
6" BARREL STRAINER, CHROME	BS60C	Kochek	1
SOFT SUCTION HOSE RUBBER COVERED	RC6081	Kochek	1
LETTERING & STRIPING		McKnight	1
10' PIKE POLE	SPD-10	Nupla	1
1-3/4" X 50' YELLOW ATTACK HOSE	FCD17BY50/15N	Snap Tite	4
1-3/4" X 50' RED ATTACK HOSE	FCD17R50/15N	Snap Tite	4
COLLISION RESTRAINT STRAPS	CRS	Zico	2
6" LOW LEVEL STRAINER	QD-600-NST	Zico	1
MOUNTING BRACKET FOR LOW LEVEL STRAINER	QD-450/800-MB	Zico	1
WHEEL CHOC	SAC-44	Zico	2
WHEEL CHOC HOLDER	SQCH-44-H	Zico	2
AIR PACK BRACKETS	UN-6-30-3-SF	Zico	2
INSTALLATION OF ABOVE ITEMS			24
Totals For Truck:			

6:24 Tom Kochheiser, Emergency Services Director, appeared before the Board to present documentation regarding deficiencies in the agreement with the Town of Hilliard for the Hilliard Fire District 4 Fire Department as they relate to response and personnel. After a review of the deficiencies, Mr. Kochheiser recommended that funding currently being provided to the Town of Hilliard be applied toward the lease-purchase of an engine/tanker to be manned and operated by the Nassau County Fire/Rescue Department currently from Hilliard Station 40. This would allow the return of the Fire District 3 Yulee Tanker to the Yulee area. It was moved by Commissioner Marshall, seconded by Commissioner Vanzant, and unanimously carried to provide to the Town of Hilliard the information presented by Mr. Kochheiser and to discuss this issue at the meeting with the Hilliard Town Council at 7:00 P.M. on August 7, 2003 in Hilliard.

10:17 Chief Cooper reviewed a request to purchase an engine/tanker for Fire Station 40 for use on the west side of the County and along CR108 corridor. It was moved by Commissioner Vanzant and seconded by Commissioner Acree to approve the purchase of the engine/tanker for Fire Station 40. During discussion it was requested that the Clerk, Director of Financial Services, and Chief Cooper meet to identify a funding source and bring this information back at the next meeting. The Board questioned whether the funds were encumbered in the contract with the Town of Hilliard, and the motion and second were withdrawn in order for the funding source to be identified.

06:53 Continuing discussion from a previous meeting, the Clerk reported that the price has been reduced and he agreed with the leasing option for the engine/tanker for Fire/Rescue. He commented that payments would be \$30,253 plus interest for seven years with funds expended from Reserves